Aeg 449

72F/10 SRC 1966

SHAUNAVON NE 13-34

NE 13 - 34 - 8 - 19 - W3

ELEV. 2940 DEPTH 51

OBSERVATION WELL

ELK POINT DRILLING LTD.

EDMONTON, ALBERTA

DRILLERS

PETER MAIK

JOHN SOLONINKO

ELEV. FROM TOP MAP 25'CI

SP COND MUD 1300 MMHOS/CM

SP COND WATER 600 MMHOS/CM

SP 10 MV R 10 OHMS

CONDUCTIVITY, SP, & R VALUES & E-LOG TRACE FROM SHAUNAVON TESTHOLE

IDEALIZED LITHOLOGIC LOG

DERIVED FROM DRILLER'S NOTES & SHAUNAVON TESTHOLE LOG

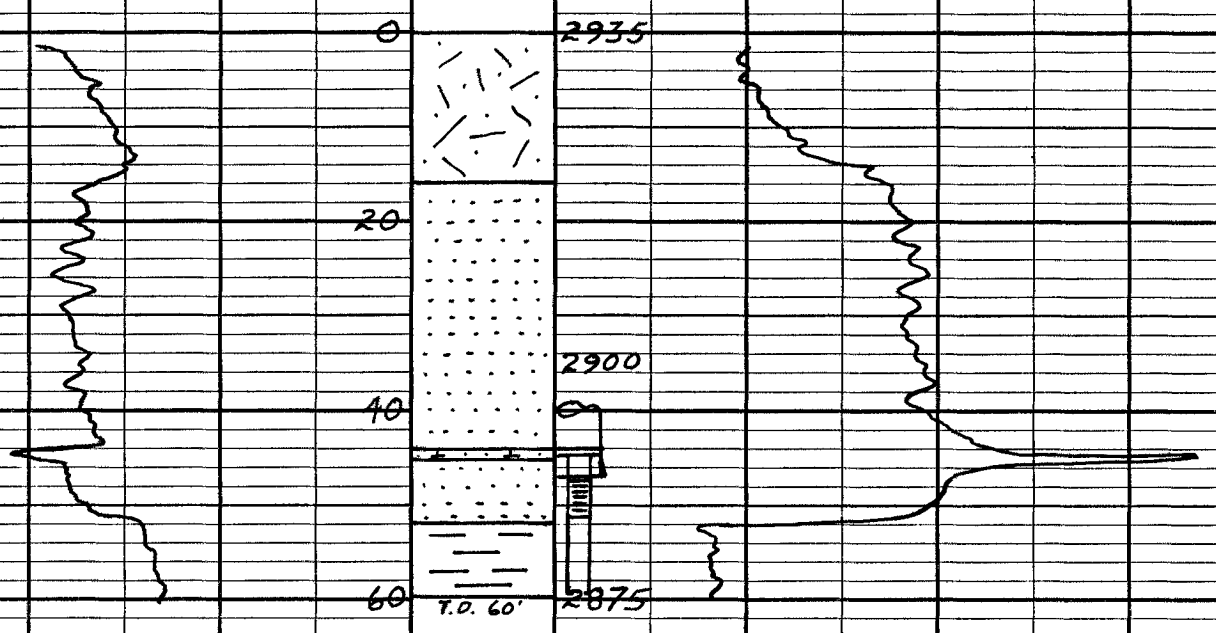

QTR	LSD	SEC	TWP	RGE	MER
NE	13	34	- 08	- 19	-W 3

Day	Mon	Year
01	11	66

Line No.	From (ft)	To (ft)	Driller's Log and Report Form
	0	16	TILL - OXIDIZED
	16	52	SAND
	52	60	CLAY
			WELL DESCRIPTION
	STEEL	CASING	DIA 6 5/8" O.D. - LENGTH 47.5' - BOTTOM @ 47'
	STEEL	EXTEN.	DIA 3" - LENGTH 2.85' - BOTTOM @ 47'
	S.S.	SCREEN	DIA 4" TELE. - LENGTH 4.3' - SLOT .007"
	STEEL	EXTEN.	DIA 3" - LENGTH 8.25' - BOTTOM @ 59.55'
			WELL BOTTOM - 59.55'
			WATER LEVEL - 6.9'
			DRAWDOWN ---- AFTER 16 HRS @ 6 GPM
			RECOMMENDED -----

Contractor :	ELK POINT DRILLING CORP.
Driller's Log By :	